

MIDI



TECHNOFLEX

POWER TO PERFORM




Startwell

www.startwell.com

Applications include:

**Caterpillar
Cummins
Detroit
Man
Perkins
Scania
Volvo**

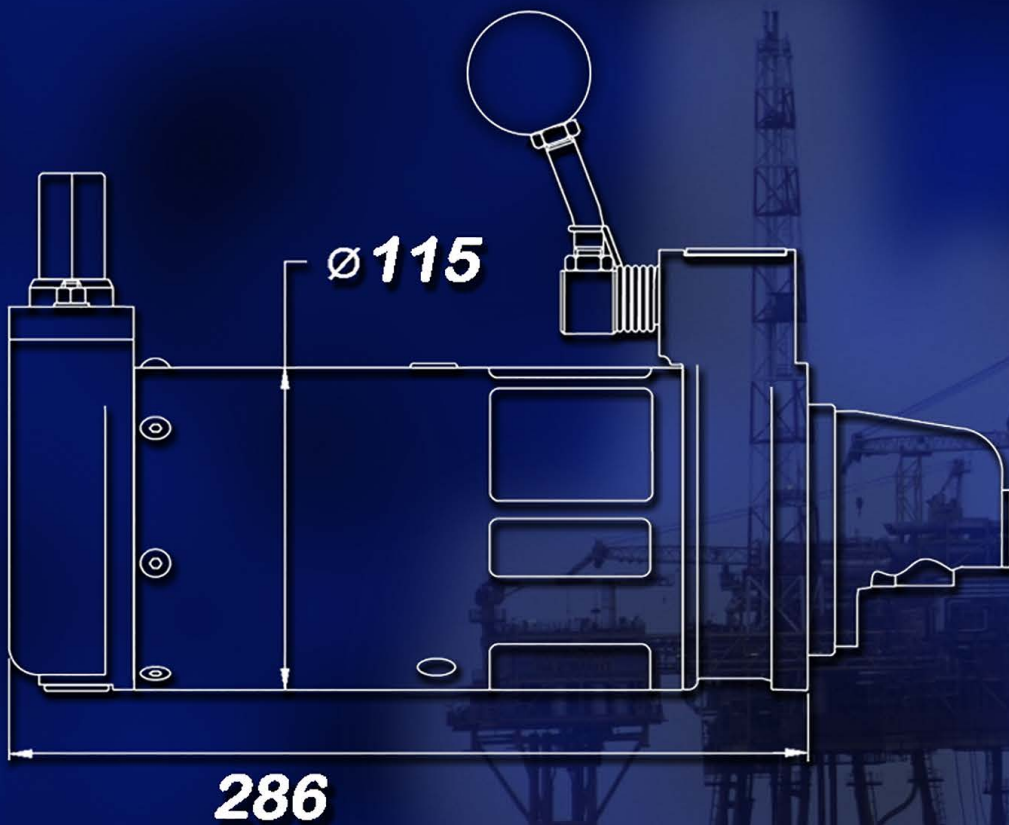

Startwell Engineering (UK) Ltd. Midi Specification



5 The Crystal Centre,
Crystal Way,
Elmgrove Road,
Harrow,
HA1 2HP, UK

tel +44 (0) 20 8863 4450
fax +44 (0) 20 8863 4410

For further information see our website:

www.startwell.com

TECHNOFLEX

Erhvervsvej 2 A 8653
Them Denmark

TLF: +45 87244545
info@technoflex

www.TECHNOFLEX.dk

Rotation:	Model SDC Clockwise Model SDA Anti-clockwise
Mounting:	Flange mounted SAE 1; SAE 2; SAE 3; SAE 4
Engine capacity:	1.1 litre/cyl, six cylinders maximum
Pinion Type:	11 to 13 teeth 10/12 F/stub 11 to 13 teeth 8/10 F/stub 9 to 13 teeth Mod 3 10 to 13 teeth Mod 2.5
Pinion to flange face:	20, 28, 47mm and other variations
Maximum torque at pinion:	115Nm (90 Ft.lb)
Maximum winding handle torque:	64 Nm (60Ft.lb)
Winding handle position:	Variable in 8.5° increments
No. of turns to fully wind:	Two turns to engage, further 10 turns to fully charge
Weight:	16Kg
Cold Start:	Starting aid below 5°
Finish:	Marine finish as standard. Zinc plated body and housing. Powder coated paint all over to withstand marine environment. Electroless nickel plated shaft and pinion.